


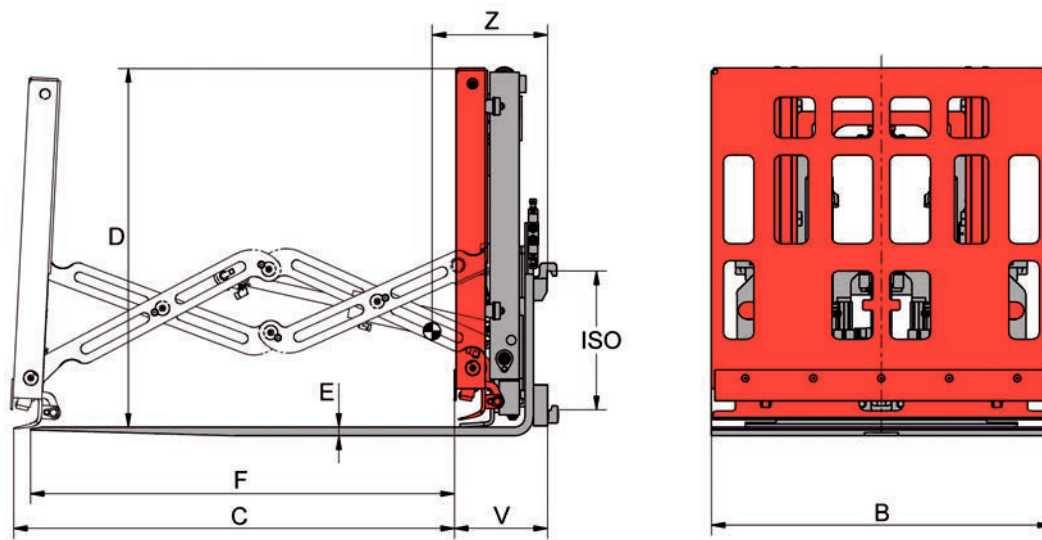


Push-Pull with sheet saver T145S

1 hydraulic function - and built in solenoid valve with accessory kit

Model	Capacity kg	B mm	C mm	D mm	E mm	F mm	ISO cl.	V mm	CofG Z mm	Weight kg
1 T 145 S	1.000	1.000	1.300	1.035	20	1.250	2	260	330	575
2 T 145 S	1.700	1.000	1.300	1.035	25	1.250	2/3	265	345	635
3 T 145 S	2.400	1.000	1.300	1.035	30	1.250	3	270	365	690

Lifting heights of more than 3.750 mm require an electric spring cable drum.

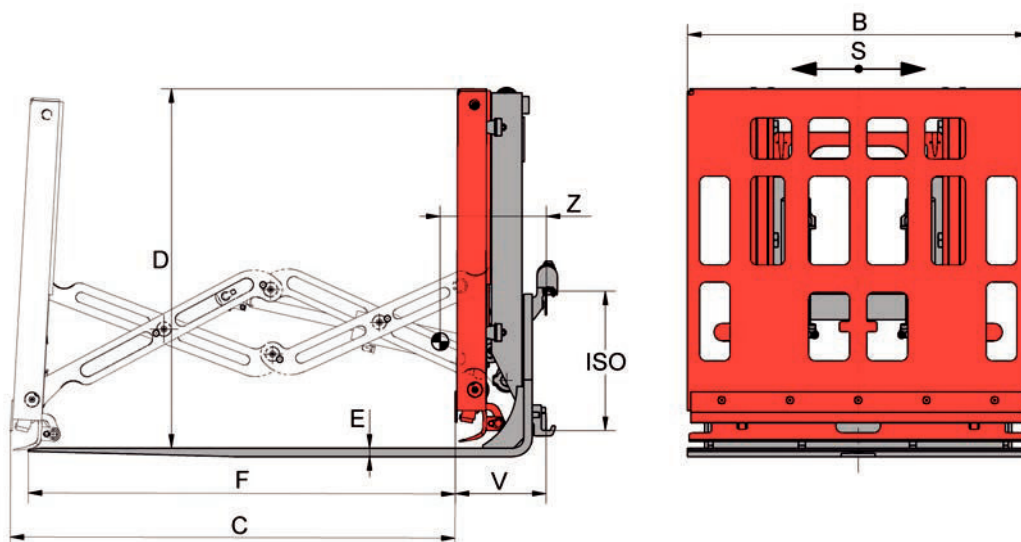

Push-Pull with sideshift and sheet saver T146S

2 hydraulic functions - and built in solenoid valve with accessory kit

Model	Capacity kg	B mm	C mm	D mm	E mm	F mm	S mm	ISO cl.	V mm	CofG Z mm	Weight kg
1 T 146 S	1.000	1.000	1.300	1.035	20	1.250	± 100	2	268	320	585
2 T 146 S	1.700	1.000	1.300	1.035	25	1.250	± 100	2/3	273	335	645
3 T 146 S	2.400	1.000	1.300	1.035	30	1.250	± 100	3	278	345	710

Lifting heights of more than 3.750 mm require an electric spring cable drum.