


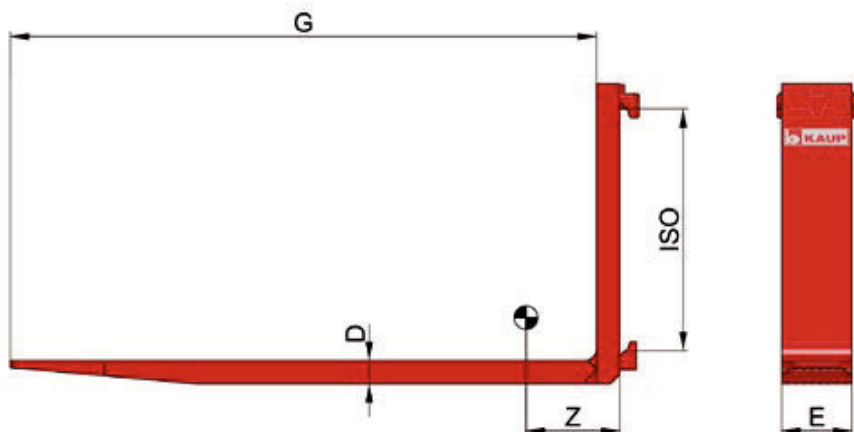


Hook-on Forks T180 - standard forks for ISO carriage

Model	Capacity per pair kg	LCD mm	E mm	D mm	G mm	ISO cl.	CofG Z mm	Weight per piece kg	Add-on Weight per 100 mm kg
2T180	1.950	500	80	40	1.000	2	294	38	2,5
					1.100		336	41	
					1.150		358	42	
					1.200		380	43	
2,5T180	2.500	500	100	40	1.000	2	294	48	3,1
					1.100		336	51	
					1.150		358	53	
					1.200		380	54	
					1.400		422	60	
					1.600		510	67	
2,5T180	2.500	600	120	40	1.000	2	294	57	3,8
					1.100		336	61	
					1.150		358	63	
					1.200		380	65	
					1.400		422	72	
					1.600		510	80	
					1.800		601	87	
					2.000		693	95	
3T180	3.000	500	100	45	1.000	3	286	58	3,5
					1.100		327	62	
					1.150		348	63	
					1.200		369	65	
					1.400		417	72	
					1.600		503	79	
					1.800		592	86	
					2.000		683	93	
4,5T180	4.500	500	120	50	1.000	3	281	76	4,7
					1.100		322	81	
					1.150		343	83	
					1.200		364	85	
					1.400		450	95	
					1.600		539	104	
					1.800		630	114	
					2.000		722	123	
					2.200		815	132	
					2.400		909	142	

Forks for KAUP Rotators (lower brackets strengthened) see page 57.


T180

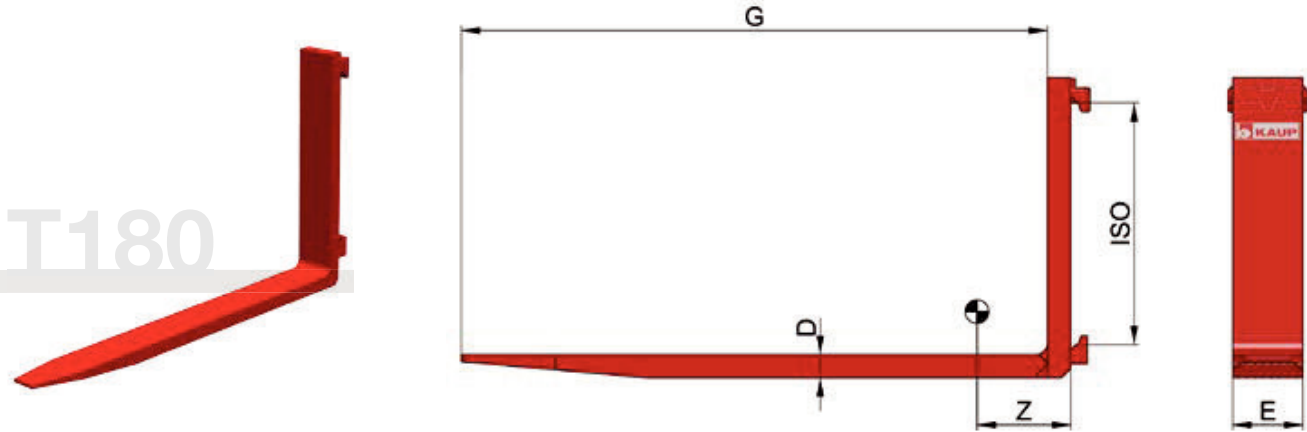

Hook-on Forks T180 - standard forks for ISO carriage

Model	Capacity per pair kg	LCD mm	E mm	D mm	G mm	ISO cl.	CofG Z mm	Weight per piece kg	Add-on Weight per 100 mm kg
5T180	5.000	600	150	50	1.000	3	281	94	5,9
					1.100		322	100	
					1.150		343	103	
					1.200		364	106	
					1.400		450	118	
					1.600		539	129	
					1.800		630	141	
					2.000		722	153	
					2.200		815	165	
7T180	7.000	600	150	60	2.400	4	909	177	7,1
					1.200		327	135	
					1.400		408	149	
					1.600		493	163	
					1.800		581	178	
					2.000		670	192	
					2.200		761	206	
9T180	9.000	600	150	70	2.400	4	853	220	8,2
					1.200		343	160	
					1.400		397	176	
					1.600		481	193	
					1.800		568	209	
					2.000		657	226	
					2.200		747	242	
12T180	12.000	600	200	70	2.400	4	838	258	11,0
					1.200		343	215	
					1.400		397	237	
					1.600		481	259	
					1.800		568	281	
					2.000		657	303	
					2.200		747	325	
14T180	14.600	600	200	80	2.400	4	838	347	12,6
					1.200		325	236	
					1.400		405	261	
					1.600		489	286	
					1.800		576	312	
					2.000		645	337	
					2.200		755	362	
					2.400		847	387	


Higher capacities and specific dimensions and special height of fork shank upon request.

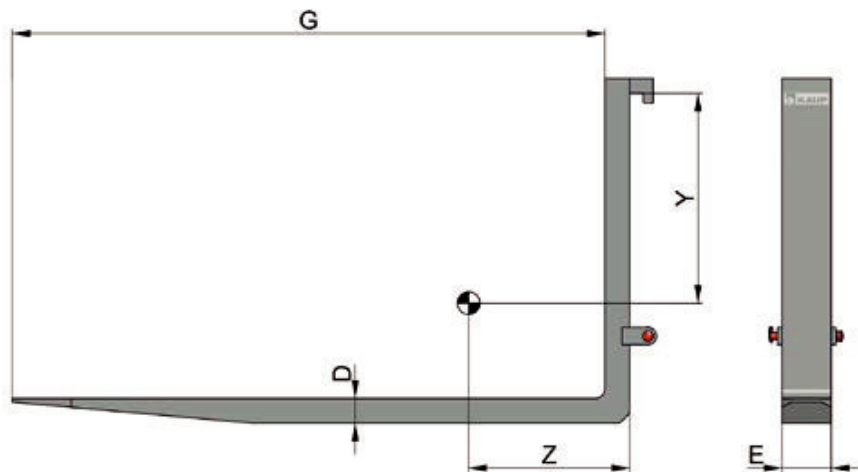


Hook-on Forks T180TW - with quick release system 'Terminal West'


Model	Capacity per pair kg	LCD mm	E mm	D mm	G mm	CofG Z mm	CofG _v Y mm	Weight per piece kg	Add-on Weight per 100 mm kg
12T 180 TW	12.000	600	200	80	1.200	250	690	270	12,6
					1.400	320	715	295	
					1.600	395	735	320	
					1.800	470	755	345	
					2.000	550	770	370	
					2.200	640	785	395	
					2.400	725	840	420	
16T 180 TW	16.000	600	200	90	1.200	235	730	305	14,1
					1.400	305	760	333	
					1.600	375	785	399	
					1.800	450	805	389	
					2.000	530	820	417	
					2.200	615	840	445	
					2.400	700	855	473	
24T 180 TW	24.000	600	250	90	1.200	240	735	370	17,7
					1.400	305	760	405	
					1.600	380	785	440	
					1.800	475	805	475	
					2.000	540	825	510	
					2.200	620	840	545	
					2.400	705	855	580	
32T 180 TW	32.000	600	250	100	1.200	235	725	395	19,6
					1.400	300	760	435	
					1.600	370	785	475	
					1.800	445	805	515	
					2.000	525	825	555	
					2.200	610	840	595	
					2.400	695	855	635	

Other capacities available upon request.



T180TW

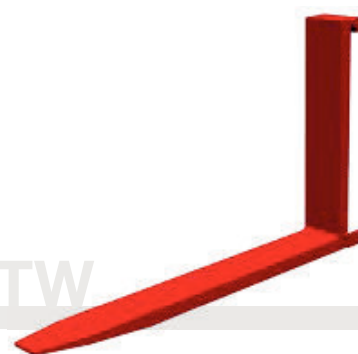

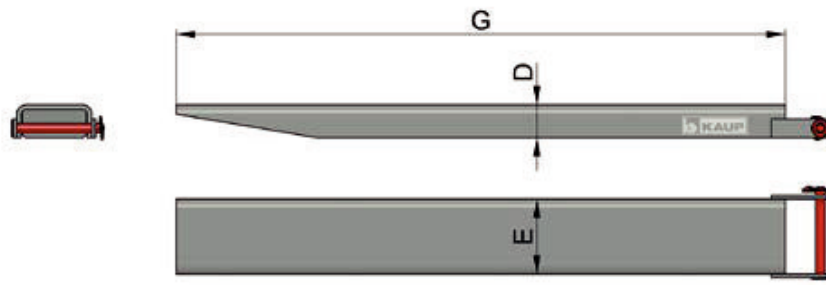


Fork Extensions T181G - closed version - for KAUP Attachments


Model	suitable for fork section mm	E mm	D mm	G mm	Weight per piece kg
1T 181G	100x40	126	66	1.200	27
				1.400	32
				1.600	36
				1.800	40
				2.000	44
1,5T 181G	120x45	148	71	1.200	31
				1.400	36
				1.600	41
				1.800	46
				2.000	51
2T 181G	120x50	148	76	1.200	32
				1.400	37
				1.600	42
				1.800	47
				2.000	52
4T 181G	150x50	181	76	2.200	57
				2.400	62
				1.200	37
				1.400	43
				1.600	49
4,5T 181G	150x60	181	86	1.800	55
				2.000	61
				2.200	67
				2.400	73
				1.200	39
6T 181G	150x70	181	96	1.400	45
				1.600	51
				1.800	57
				2.000	63
				2.200	69
8T 181G	200x60	236	86	2.400	75
				1.200	41
				1.400	47
				1.600	53
				1.800	59
10T 181G	200x70	236	96	2.000	65
				2.200	71
				2.400	77
				1.200	45
				1.400	53
				1.600	61
				1.800	69
				2.000	77
				2.200	85
				2.400	93
				1.200	47
				1.400	55
				1.600	63
				1.800	71
				2.000	79
				2.200	87
				2.400	95

Other dimensions available upon request.



Criteria for choosing fork extensions: the fork extensions must be supported by at least 60 % of the existing fork length. Fork extension capacity corresponds to capacity of forks.



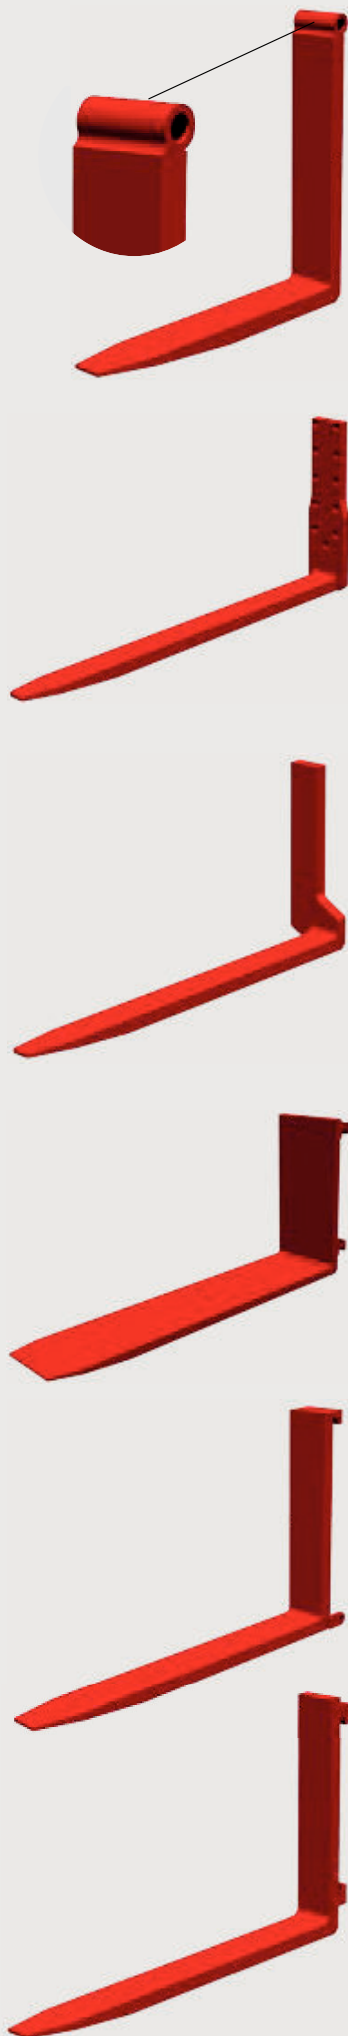

Pin-Type Forks

shaft mounting

KAUP offers nearly every type of Pin-Type forks (shaft guided forks). As the dimensions are not standardized, and as these are mounted on a wide variety of high capacity forklift trucks and construction machines, we require detailed information before quoting such forks.

Bolt-on (screw-on) Forks

for attachments with bolt-on plates

Screw-on forks are fitted to the attachment by screws. As drill patterns are not standardized and may vary according to the manufacturer of the lift truck or the attachment we require detailed information before quoting such forks.

Special Forks

KAUP's programme includes nearly every type of special fork available on the market e.g. forks with offset shank, knife forks (full taper), folding forks, inverted forks, double forks (fork pairs), etc.

Forks with special dimensions

KAUP forks are available with fork sections ranging from 80 x 40 mm up to 400 x 120 mm.

Fork lengths of up to 3.000 mm and fork shank heights of 2.000 mm are available.

Forks with quick release system 'Terminal West'

Model code T180TW - see page 122.

Forks for Rotators

lower brackets strengthened - see page 57.

For projects with KAUP special forks it is advisable to contact our specialists directly for a specific quotation.