


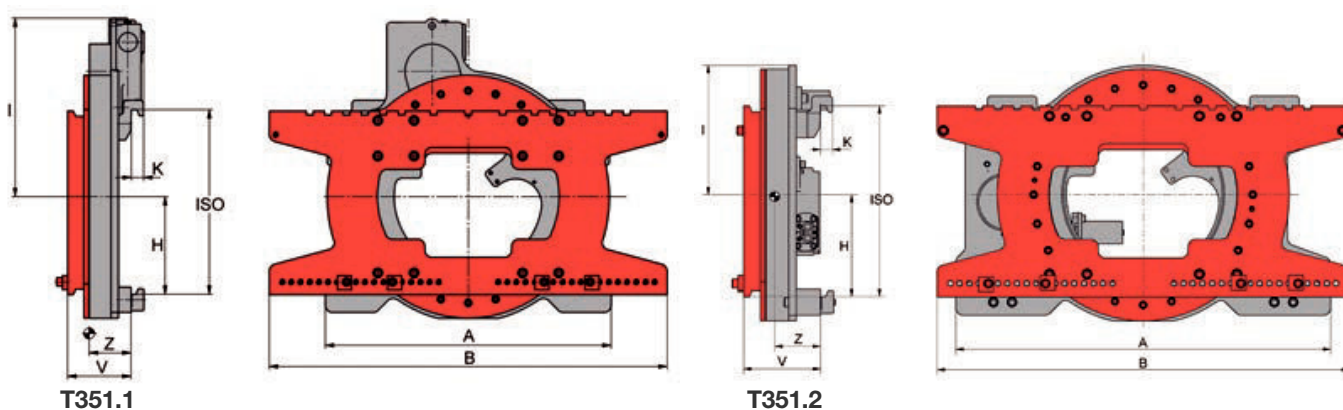

Rotator 360° endless T351 - 1 hydraulic function

Model	Capacity kg	LCD mm	A mm	B mm	H mm	I mm	K mm	ISO cl.	Torque Md $\Delta p=$ 125 bar Nm	Oil volume required per rev. ltr.	V mm	CofG Z mm	Weight kg
0,8 T 351.2 ¹⁾	1.200	500	860	890 1.040	203	278	33	2	4.226	5,3	156	94 97	165 175
1 T 351.1	1.800	500	560	780 890	213	478	33	2	6.013	7,6	155	78 80	166 171
1 T 351.2	1.800	500	780	780 890	211	287	31	2	6.013	7,6	190	108 110	172 177
2 T 351.1	2.500	500	790	1.040	269	457	33	2	7.700	9,7	166	90	225
2 T 351.2	2.500	500	1.000	1.040	270	345	29	2	7.700	9,7	200	113	255
2,5 T 351.1	3.200	500	790	1.100	269	492	33	3	7.700	9,7	176	98	290
2,5 T 351.2	3.200	500	1.000	1.100	270	345	33	3	7.700	9,7	205	122	305
4 T 351.2	5.000	500	1.010	1.100	339	395	33	3	8.950	11,3	213	122	380
4,5 T 351.1	5.000	500	870	1.350	328	675	36	4	14.823	17,4	221	124	524
5 T 351.2	6.000	600	1.260	1.350	345	455	40	4	13.434	15,7	264	156	655
6 T 351.2	6.500	600	1.260	1.350	345	455	40	4	17.157	20,7	264	150	715
8 T 351.2	8.000	900	1.300	1.600	396	485	40	4	21.679	18,8	304	172	1.045

¹⁾ Fork carriage plate closed. Rotator 0,8T351.2-SG available upon request.

Rotators with higher rotating speeds available upon request. Other fork carriage widths available upon request.

Optional:


Forks for KAUP Rotators - lower brackets strengthened - see page 5

Downhold with gripping claw T167 - see page 5

Lateral supporting fork 1.000 mm



Removable



Foldable (on left or right side)



Removable and foldable