


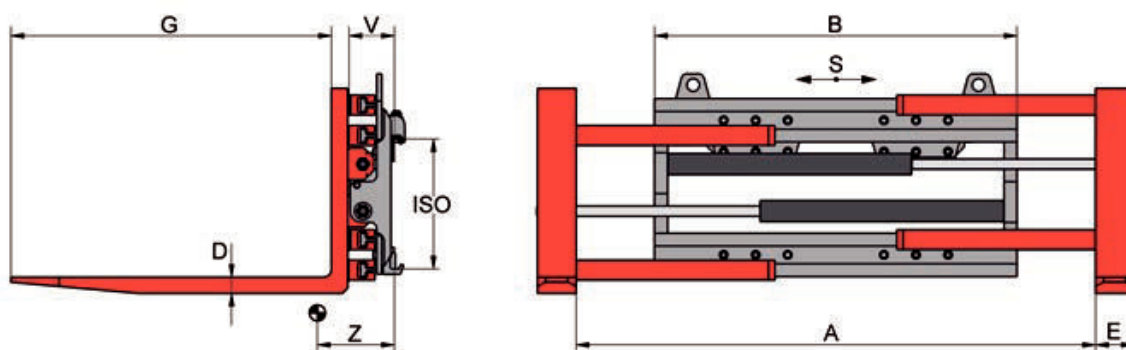

Fork Clamp T411

with **independent sideshift** - 2 hydraulic functions

The Fork Clamp can be used for the transportation of palletised goods as well as for clamping purposes. Slip-on arms in different versions easily turn the Fork Clamp into a special clamp.

Model	Capacity of forks kg	Capacity as clamp kg	LCD mm	S mm	A mm	B mm	D mm	E mm	G mm	ISO cl.	V mm	CofG Z mm	Weight kg
1 T 411	1.500	700	500	± 100	340-1.300 340-1.520 350-1.700 330-1.730	750 970 1.130 1.200	40	100	1.200	2	133	268 251 244 241	236 258 269 273
1,5 T 411	2.300	1.250	500	± 100	320-1.500 40- 940 330-1.680 90-1.270 310-1.710	970 970 1.130 1.200 1.200	45	120	1.200	2	133	266 254 253 252 270	323 312 335 336 339
1,5 T 401	2.300	1.250	500	without	260-1.260	850	45	120	1.200	2	126	260	300
2 T 411	2.800	2.000	500	± 100	280-1.380 320-1.620 70-1.120 120-1.420 320-1.820	970 1.130 1.130 1.330 1.330	50	120	1.200	2/3	143	262 257 259 252 250	384 396 391 408 412
2 T 401	2.800	2.000	500	without	300-1.300	850	50	120	1.200	2/3	136	282	339
3 T 411	3.600	2.500	500	± 100	260-1.560 260-1.760 130-1.630 260-1.890	1.130 1.330 1.460 1.460	50	150	1.200	3	152	255 249 245 245	510 529 539 541
4 T 411	4.150	2.900	500	± 100	260-1.560 260-1.760 130-1.630 260-1.890	1.130 1.330 1.460 1.460	50	150	1.200	3	162	245 240 237 236	572 591 603 606
4,5 T 411	5.000	3.500	500	± 100	230-1.480 250-1.650 120-1.520 220-1.720 260-1.890	1.200 1.330 1.460 1.460 1.550	60	150	1.200	3	188	253 248 245 244 241	689 709 725 728 744
4,5 T 411.1	5.000	3.500	500	± 100	230-1.480 250-1.650 120-1.520 260-1.890	1.200 1.330 1.460 1.550	60	150	1.200	3	178	250 246 243 240	687 705 718 734
4,8 T 411	5.000	3.200	600	± 100	230-1.480 250-1.650 120-1.520 260-1.890	1.200 1.330 1.460 1.550	70	150	1.200	3	178	274 270 267 263	733 752 765 781
5 T 411	6.200	3.500	600	± 160	240-1.740 280-1.910 550-2.450 280-2.180	1.460 1.550 1.550 1.820	70	150	1.200	4	176	244 242 234 236	855 868 933 905
6 T 411 B	8.000	4.800	600	± 160	180-1.810 140-2.040 340-2.440	1.550 1.860 1.860	60	200	1.200	4	259	238 229 229	1.410 1.499 1.506
8 T 411 B	8.000	6.500	600	VSS	310-2.510	2.200	70	200	1.200	4	309	241	2.045

Clamp available with cylinder and sideshift protection upon request. Load Backrest Model T479 see page 8.

Available without sideshift - model T401.

Also available with bolt-on forks.